


STANDARD SIZE U-DRAINS

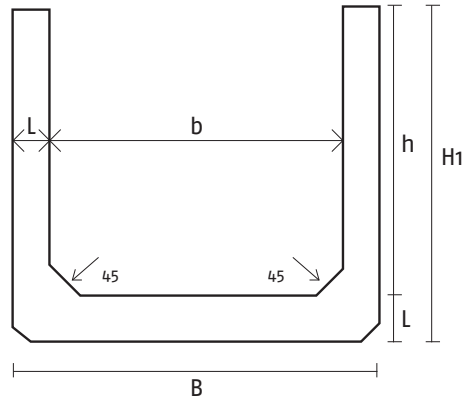

Standard Size U-Drains

NOMINAL SIZE	COMMON DIMENSIONS				U-DRAIN
b x h (mm)	B (mm)	b (mm)	h (mm)	L (mm)	H1 (mm)
300 x 300	400	300	300	50	350
375 x 375	505	375	375	65	440
450 x 450	550	450	450	50	500
450 x 450	600	450	450	75	525
600 x 300	750	600	300	75	375
600 x 450	750	600	450	75	525
600 x 600	750	600	600	75	675
750 x 300	910	750	300	80	380
750 x 450	910	750	450	80	530
750 x 600	910	750	600	80	680
750 x 750	910	750	750	80	830
900 x 300	1080	900	300	90	390
900 x 450	1080	900	450	90	540
900 x 600	1080	900	600	90	690
900 x 750	1080	900	750	90	840
900 x 900	1080	900	900	90	990

*Concrete Grade - 30N/mm²

S-Mix 'U' Shape Open Drains varies in size from 300mm width x 300mm height to 3600mm width x 3600mm height.

S-Mix Reinforced Concrete Open Drain incorporates a dry weather flow section.

Standard Length - 1m

*Specifications are subject to change without prior notice.




坚合灰料有限公司
SOLID-MIX CEMENT WORKS SDN. BHD. (817035-T)

坚合灰料工业(马)有限公司
S-MIX CONCRETE INDUSTRIES (M) SDN. BHD. (572101-V)

Office: 26, Jalan Duyong, Kampung Jambatan Duyong, 76460 Melaka. Tel: 06-2672 202 / 2689 633 Fax: 06-2680 373 Email: smcwsb@hotmail.my
Factory: Lot 564 & PT 3689, Mukim Cheng, 75250 Melaka. H/P: 012-611 0204 / 016-662 8513 Email: smixconc@hotmail.my

STANDARD SIZE U-DRAINS

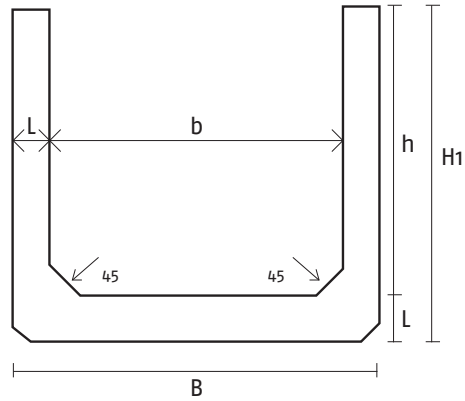

Standard Size U-Drains

NOMINAL SIZE	COMMON DIMENSIONS				U-DRAIN
b x h (mm)	B (mm)	b (mm)	h (mm)	L (mm)	H1 (mm)
1200 X 300	1400	1200	300	100	400
1200 X 450	1400	1200	450	100	550
1200 X 600	1400	1200	600	100	700
1200 X 750	1400	1200	750	100	850
1200 X 900	1400	1200	900	100	1000
1200 X 1050	1400	1200	1050	100	1150
1200 X 1200	1400	1200	1200	100	1300
1500 X 600	1720	1500	600	110	710
1500 X 750	1720	1500	750	110	860
1500 X 900	1720	1500	900	110	1010
1500 X 1050	1720	1500	1050	110	1160
1500 X 1200	1720	1500	1200	110	1310
1500 X 1350	1720	1500	1350	110	1460
1500 X 1500	1720	1500	1500	110	1610

*Concrete Grade - 30N/mm²


S-Mix 'U' Shape Open Drains varies in size from 300mm width x 300mm height to 3600mm width x 3600mm height.

S-Mix Reinforced Concrete Open Drain incorporates a dry weather flow section.

Standard Length - 1m

*Specifications are subject to change without prior notice.

STANDARD SIZE U-DRAINS

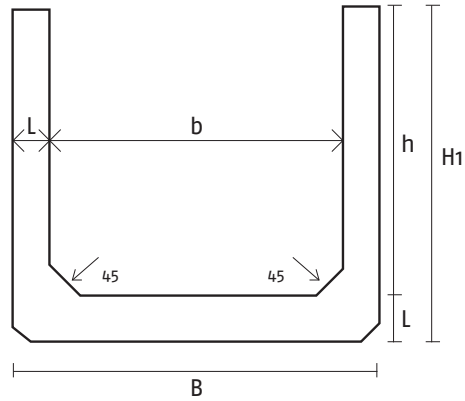

Standard Size U-Drains

NOMINAL SIZE	COMMON DIMENSIONS				U-DRAIN
b x h (mm)	B (mm)	b (mm)	h (mm)	L (mm)	H ₁ (mm)
1800 x 600	2040	1800	600	120	720
1800 x 750	2040	1800	750	120	870
1800 x 900	2040	1800	900	120	1020
1800 x 1050	2040	1800	1050	120	1170
1800 x 1200	2040	1800	1200	120	1320
1800 x 1350	2040	1800	1350	120	1470
1800 x 1500	2040	1800	1500	120	1620
1800 x 1650	2040	1800	1650	120	1770
1800 x 1800	2040	1800	1800	120	1920

*Concrete Grade - 30N/mm²

S-Mix 'U' Shape Open Drains varies in size from 300mm width x 300mm height to 3600mm width x 3600mm height.

S-Mix Reinforced Concrete Open Drain incorporates a dry weather flow section.

Standard Length - 1m

*Specifications are subject to change without prior notice.